

EAML 58 B / C - 63 A / D / E ANALOGUE SOLID SHAFT MULTITURN ABSOLUTE ENCODER

MAIN FEATURES


Industry standard multiturn absolute encoders for factory automation applications.

- Optical/magnetic (proprietary optoASIC + energy harvesting) sensor technology
- Programmable measuring range via teach-in function (external inputs or cover button)
- Power supply up to +30 VDC with analogue (voltage or current) electrical interface
- Cable or M12 connector output
- Solid shaft diameter up to 10 mm
- Mounting by synchronous, clamping or centering 2,5" square flange




ORDERING CODE	EAML	63A	16B 12/30	V	05	X	10	X	M12	R	.162	+XXX
SERIES analogue multiturn absolute encoder EAML												
MODEL synchronous flange ø 31.75 mm 63A synchronous flange ø 50 mm 58B clamping flange ø 36 mm 58C centering square flange ø 31.75 mm 63D centering square flange ø 50 mm 63E												
OUTPUT DAC RESOLUTION 16 bit 16B												
POWER SUPPLY 12 ... 30 V DC 12/30												
ELECTRICAL INTERFACE voltage V current I												
OUTPUT RANGE 0 ... 5 V 05 0 ... 10 V 010 0 ... 20 mA 020 4 ... 20 mA 420												
OPTIONS to be reported with voltage output / 3 wires current output X 4 wires current output Q												
SHAFT DIAMETER (mod. 58 B) mm 6 (mod. 63 A / D) 3/8"- mm 9,52 (mod. 58 C - 63 A / D / E) mm 10												
ENCLOSURE RATING IP 65 shaft side / IP67 cover side X IP 67 S												
OUTPUT TYPE cable (standard length 1,5 m) P preferred cable lengths 2 / 3 / 5 / 10 m, to be added after DIRECTION TYPE (eg. PR5) M12 plug connector M12												
DIRECTION TYPE radial R												
SOCKET socket not included .162 to be reported only with connector output (eg. M12R.162), for socket see Accessories												
VARIANT custom version XXX												

63A

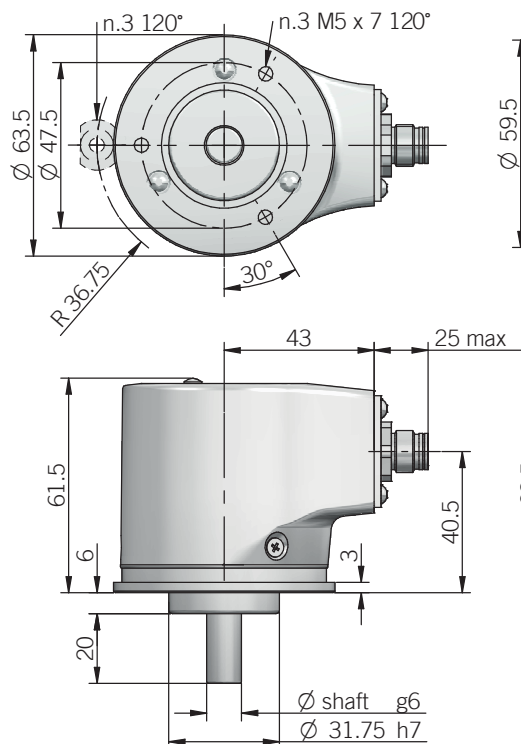


for fixing clamps please refer to Accessories

58B

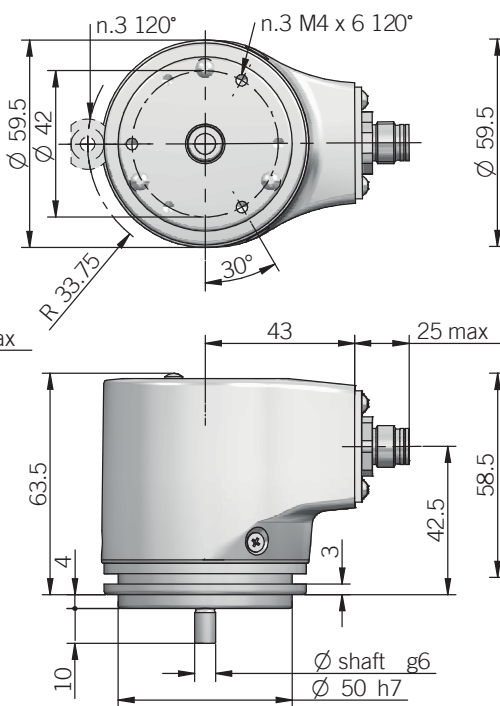


for fixing clamps please refer to Accessories

58C

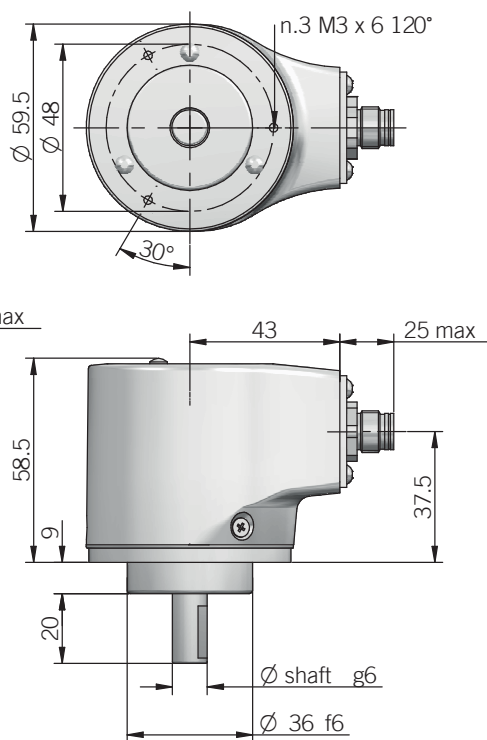


63D

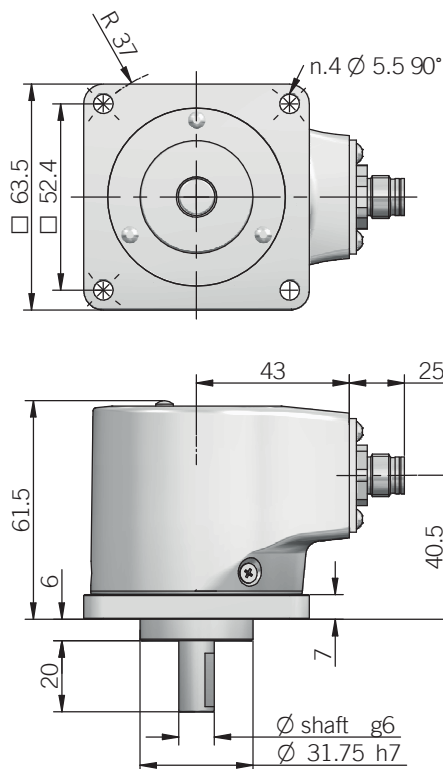

recommended mating shaft tolerance H7
dimensions in mm

63E

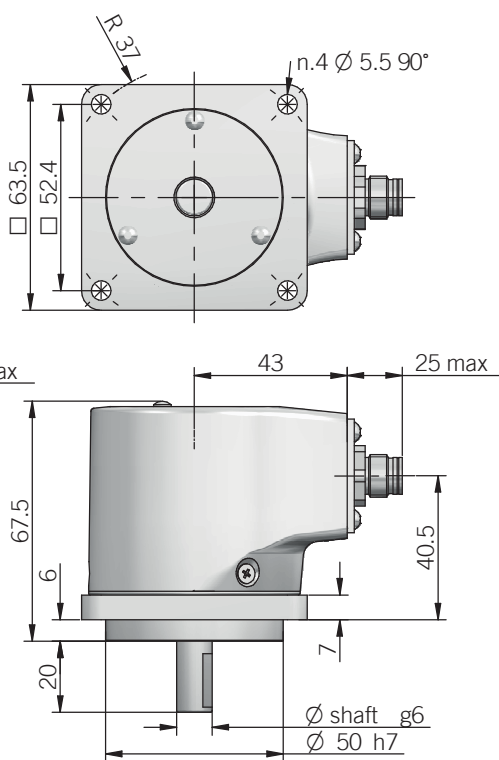


ELECTRICAL SPECIFICATIONS


Multiturn resolution	16 bit max
Singleturn resolution	16 bit max
Output DAC resolution	16 bit
Minimum angle	22,5°
Power supply¹	11,4 ... 30 V DC (reverse polarity protection)
Power draw without load	< 1 W
Electrical interface²	voltage (0 ... 5 V / 0 ... 10 V) current (0 ... 20 mA / 4 ... 20 mA)
Auxiliary inputs (BEGIN - END)	active high (+V DC) connect to 0 V if not used / t_{min} 150 ms
Load	$R_{min} = 1 \text{ k}\Omega$ (voltage output) $R_{max} = (V_{DC} - 2) / 0,02$ (current output)
Output update frequency	16 kHz
Signal pattern	auto teaching according to commissioning
Start-up time	700 ms
Linearity error	$\pm 0,069^\circ$
Mean time to dangerous failure (MTTF)³ according to EN ISO 13849-1	186 years
Mission time (Tm)³	20 years
Diagnostic coverage (DC)³	0%
Cable type	shielded - fixed installation conductors section 0,22 mm ² / AWG 24 bending radius min 60 mm
Electromagnetic compatibility	according to 2014/30/EU directive
RoHS	according to 2011/65/EU directive
UL / CSA	file n. E212495

ELECTRICAL INTERFACE

VOLTAGE OUTPUT

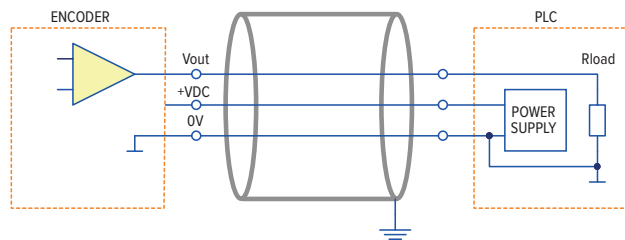

CURRENT OUTPUT

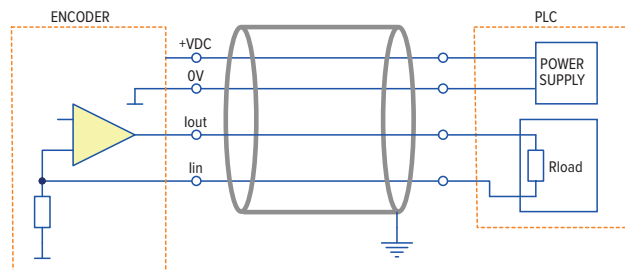

3 / 4 wire source

with 3 wires interface Iin is internally connected to 0V

MECHANICAL SPECIFICATIONS

Shaft diameter	ø 6 / 9,52 (3/8") / 10 mm
Enclosure rating IEC 60529	X = IP 65 shaft side / IP67 cover side S = IP 67
Max rotation speed	see table
Max shaft load⁴	200 N (45 lbs) axial / 70 N (15,74 lbs) radial
Shock	50 G, 11 ms (IEC 60068-2-27)
Vibration	10 G, 10 ... 2000 Hz (IEC 60068-2-6)
Moment of inertia	$1,5 \times 10^{-6} \text{ kgm}^2$ ($36 \times 10^{-6} \text{ lbf}^2$)
Starting torque (at +20°C / +68°F)	< 0,03 Nm (4,25 Ozin)
Bearing stage material	aluminum
Shaft material	stainless steel
Housing material	painted aluminium
Bearings	n.2 ball bearings
Bearings life	10 ⁹ revolutions
Operating temperature^{5,6}	-20° ... +85°C (-4 ... +185°F)
Storage temperature⁶	-20° ... +85°C (-4° ... +185°F)
Weight	approx 350 g (12,35 oz)

¹ as measured at the transducer without cable influences² for further details refer to OUTPUT LEVELS on TECHNICAL BASICS section³ this product is not a safety component, for further details refer to TECHNICAL BASICS section⁴ maximum load for static usage⁵ measured on the transducer flange⁶ condensation not allowed


ROTATION SPEED / TEMPERATURE TABLE

Temperature °C (°F)	Max speed (rpm)	Max continuous speed (rpm)
up to +70 (+158)	10000	8000
+70 ... +85 (+158 ... +185)	8000	5000

CONNECTIONS

Function	Cable	5 pin M12	8 pin M12*
+ V DC	red	2	2
0 V	black	3	3
V_{out} / I_{out}	green	1	1
I_{in}	yellow	/	6
BEGIN	white	4	4
END	brown or grey	5	5
⏏	shield	housing	housing

* with Q current output

M12 connector (5 pin)
M12 A coded
front viewM12 connector (8 pin)
M12 A coded
front view