EAMX 80 A / D
SSI
EXPLOSION PROOF ATEX MULTITURN ABSOLUTE ENCODER

MAIN FEATURES

Explosion proof encoders designed to operate in hazardous and explosive environments.

- Optical/magnetic (proprietary optoASIC + energy harvesting) sensor technology
- Resolution up to 65 bit (25 bit singleturn + 40 bit multiturn)
- Power supply up to +30 VDC with SSI as electrical interface
- Cable output
- Solid shaft diameter up to 10 mm
- Mounting with syncronous or centering square flange

EX CLASSIFICATION

It has been assured with EC-TYPE Examination Certifcate CESI 04 ATEX 082 that the EAMX 80 is compliant with essential health and safety requirements according to

- EN IEC 60079-0:2018
- EN 60079-1:2014
- EN 60079-31:2014

The UE declaration is available on www.eltra.it

ORDERING CODE

EAMX	80A	12 / 13	G	8/30	S	X	10	X	PR	. XXX

SERIES
multiturn absolute explosion proof encoder EAMX

MODEL
synchronous flange ø 40 mm 80A
centering square flange ø 40 mm 80D

MULTITURN RESOLUTION
bit 12 / 14 / 15
see table for preferred combinations

SINGLETURN RESOLUTION
bit 13 / 18 / 25
see table for preferred combinations

CODE TYPE
binary B
gray G

POWER SUPPLY
8 ... 30 V DC 8/30

ELECTRICAL INTERFACE
Serial Synchronous Interface - SSI S

OPTION
to be reported if not used X
reset with external input ZE

SHAFT DIAMETER
mm 10

ENCLOSURE RATING
IP 65 X

OUTPUT TYPE
radial cable (standard length 1,5 m) PR
preferred cable lengths 2 / 3 / 5 / 10 m, to be added after OUTPUT TYPE (eg. PR5)

VARIANT
custom version XXX

© Copyright 2025 Eltra S.p.a. Unipersonale. All rights reserved. All informations in this catalog are subject to change without notice.
Eltra takes no responsibility for typographic errors. For the terms of sales please check the website. REV. 2502

eltra.it@broadcom.com

80A

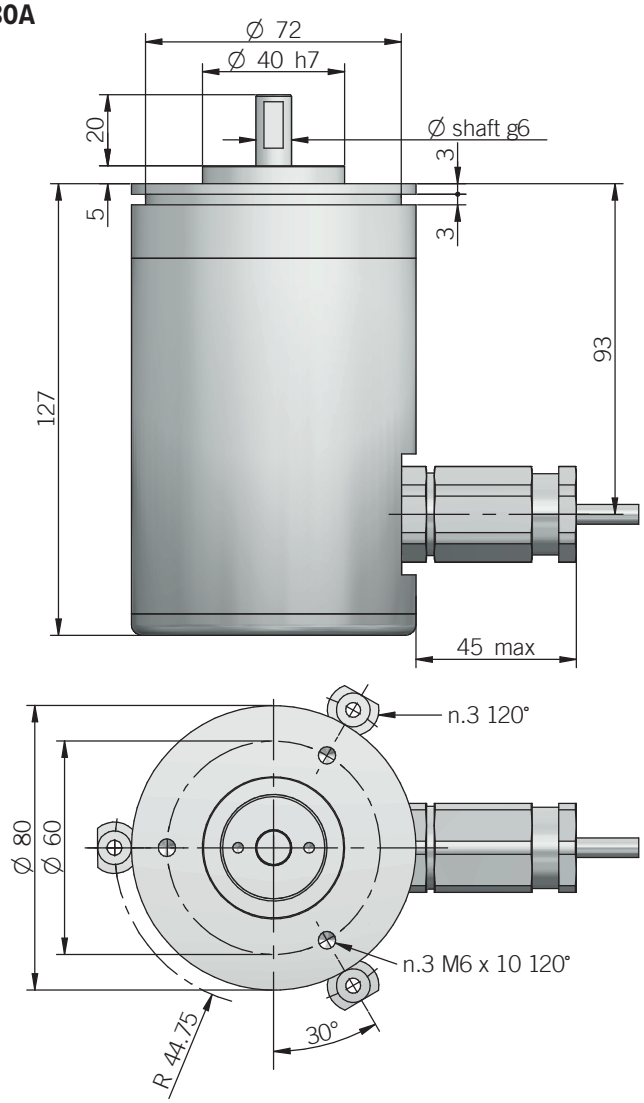

80D

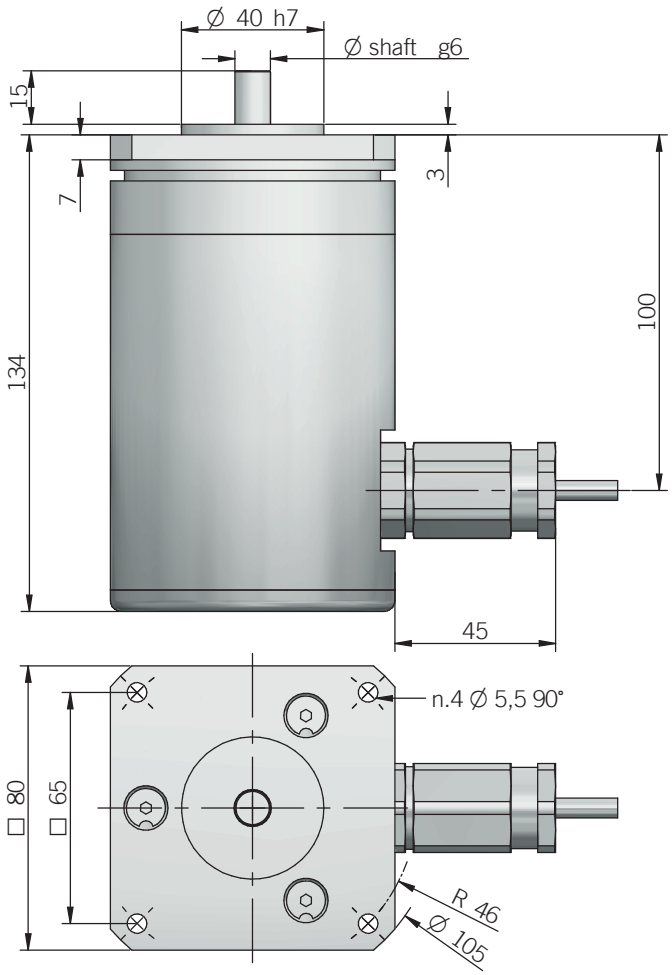

fixing clamps not included, please refer to Accessories
recommended mating shaft tolerance G6
dimensions in mm

EPL MARKING

II 2GD
Ex db IIC T6 Gb
Ex tb IIIC T85°C Db
IP 65

II 2GD

II: group II: different than mines
2: category 2: high level of protection
GD: areas containing gas (G) and dust (D)

Ex db IIC T6 Gb

Ex db: flameproof enclosure for explosive atmospheres with gases, vapours and mists
IIC: group of gas IIC
T6: max surface temperature +85°C of the device for atmospheres with gas
Gb: product with a high level of protection

Ex tb IIIC T85°C Db

Ex tb: flameproof enclosure safety type
IIIC: group of dust combustibles IIIC
T85°C: max surface temperature +85°C of the device in the presence of dust
Db: product with a high level of protection

© Copyright 2025 Eltra S.p.a. Unipersonale. All rights reserved. All informations in this catalog are subject to change without notice.
Eltra takes no responsibility for typographic errors. For the terms of sales please check the website. REV. 2502

ELECTRICAL SPECIFICATIONS

Multiturn resolution	12 / 14 / 15 bit please directly contact our offices for other pulses
Singleturn resolution	preferred combinations 12 multiturn / 13 singleturn 14 multiturn / 18 singleturn 15 multiturn / 25 singleturn please directly contact our offices for other pulses
Power supply[1]	7,6 ... 30 V DC (reverse polarity protection)
Current consumption without load	100 mA max
Electrical interface[2]	RS-422 (THVD1451 or similar)
Auxiliary inputs (U/D - RESET)	active high (+V DC) connect to 0 V if not used / RESET t_{min} 150 ms
Max frequency	clock input 100 kHz ... 1 MHz
Code type	binary or gray
Logic	positive
SSI monostable time (Tm)	20 µs
SSI pause time (Tp)	> 35 µs
SSI frame	tree format MSB ... LSB up to 12 bit multiturn = length 25 bit (12MT + 13ST) 14 bit multiturn = length 32 bit (14MT + 18ST) 15 bit multiturn = lenght 40 bit (15MT + 25ST)
SSI status and parity bit	on request
Counting direction	decreasing clockwise (shaft view)
Start-up time	700 ms
Accuracy	± 0,069°
Mean time to dangerous failure ($MTTF_d$)[3] **according to EN ISO 13849-1**	186 years
Mission time (Tm)[3]	20 years
Diagnostic coverage (DC)[3]	0%
Cable type	shielded - fixed or flexible installation conductors section min 0,14 mm² / AWG 26 bending radius min 35 mm (fixed) / min 60 mm (flexible)
Electromagnetic compatibility	according to 2014/30/EU directive
RoHS	according to 2011/65/EU directive
UL / CSA	file n. E212495

CONNECTIONS

Function	Cable
+ V DC	red
0 V	grey
DATA +	green
DATA -	brown
CLOCK +	yellow
CLOCK -	pink
U / D	blue
RESET	white
⏚	shield

MECHANICAL SPECIFICATIONS

Shaft diameter	ø 10 mm
Enclosure rating	IP 65 (IEC 60529)
Max rotation speed	3000 rpm
Max shaft load[4]	200 N (45 lbs) axial / radial
Shock	50 G, 11 ms (IEC 60068-2-27)
Vibration	10 G, 10 ... 2000 Hz (IEC 60068-2-6)
Moment of inertia	1,5 x 10^{-6} kgm² (36 x 10^{-6} lbft²)
Starting torque (at +20°C / +68°F)	< 0,06 Nm (8,50 Ozin)
Bearing stage material	anodized aluminum
Shaft material	stainless steel
Housing material	anodized aluminum
Bearings	n.2 ball bearings
Bearings life	10^9 revolutions
Operating temperature[5, 6]	0° ... +50°C (+32° ... +122°F)
Storage temperature[6]	-15° ... +70°C (+5° ... +158°F)
Weight	1200 g (42,33 oz)

[1] as measured at the transducer without cable influences
[2] for further details refer to OUTPUT LEVELS on TECHNICAL BASICS section
[3] this product is not a safety component, for further details refer to TECHNICAL BASICS section
[4] maximum load for static usage
[5] measured on the transducer flange
[6] condensation not allowed

SSI ELECTRICAL INTERFACE

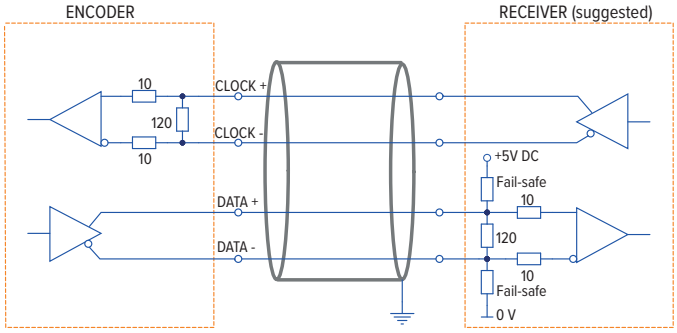

© Copyright 2025 Eltra S.p.a. Unipersonale. All rights reserved. All informations in this catalog are subject to change without notice.
Eltra takes no responsibility for typographic errors. For the terms of sales please check the website. REV. 2502

eltra.it@broadcom.com