

# AAM 20 M

## BISS / RS-485 / SPI / SSI

### MAGNETIC MULTITURN ABSOLUTE KIT ENCODER

#### MAIN FEATURES

The AAM 20M is a miniature magnetic sensing absolute multiturn kit encoder based on proprietary energy harvesting technology. The multiturn is a battery-less and non-gear-based solution that eliminates the need for maintenance and contamination prevention. The AAM 20M is equipped with a range of intelligent features, including a built-in temperature sensor, user-programmable resolution, zero reset and system alarm.


- Maximum resolution 50 bits (18 bits singleturn + 32 bits multiturn)
- BiSS-C, RS-485, SPI or SSI electrical interface
- Radial output with PCB connector
- Operating temperature -40° ... +115°C (-40° ... +239°F)




ORDERING CODE	AAM	20M	24	/	18	B	5	S	4	X	LR	.162	+XXX
<b>SERIES</b> magnetic multiturn absolute encoder	AAM												
<b>MODEL</b> kit encoder ø 20mm		20M											
<b>MULTITURN RESOLUTION</b> turns			24										
<b>SINGLETURN RESOLUTION</b> bit				18									
<b>CODE TYPE</b> binary					B								
<b>POWER SUPPLY</b> V DC						5							
<b>ELECTRICAL INTERFACE</b> BiSS-C RS-485 SPI Serial Synchronous Interface - SSI								B RS485 SPI S					
<b>BORE DIAMETER</b> mm									4				
<b>ENCLOSURE RATING</b> IP										10			
<b>OUTPUT TYPE</b> radial connector											LR		
<b>SOCKET</b> socket not included												.162	
<b>VARIANT</b> custom version													XXX

PRELIMINARY

AAM 20M

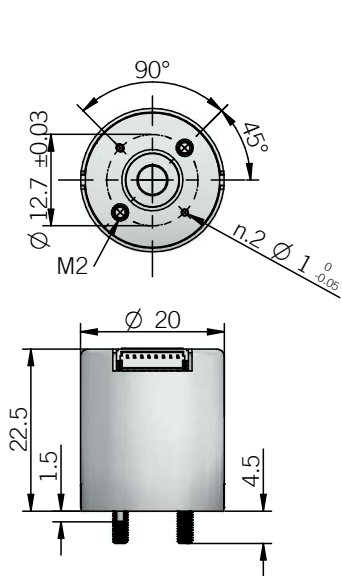

RECOMMENDED INTERFACE FLANGE DESIGN

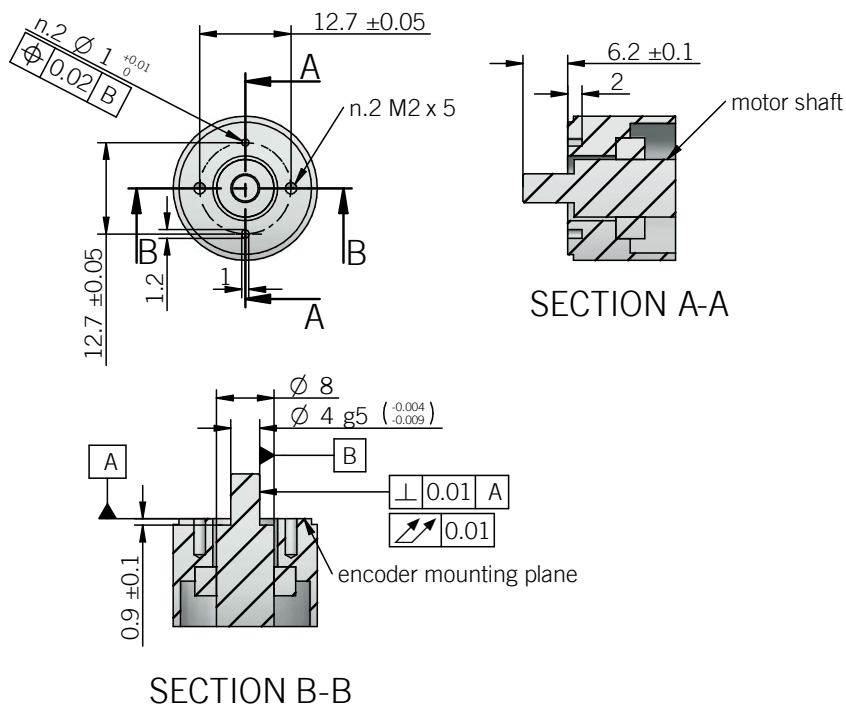

dimensions in mm

ELECTRICAL SPECIFICATIONS	
<b>Multiturn resolution</b>	24 bit can be selected between 12-14-16-20-24-32 bits
<b>Singleturn resolution</b>	18 bit can be selected between 15-16-17-18 bits
<b>Power supply<sup>1</sup></b>	4,5 ... 5,5 V DC
<b>Current consumption without load</b>	45 mA max
<b>Electrical interface</b>	RS-422 (BiSS/SSI) - RS-485 - SPI 4 wires
<b>Clock frequency</b>	BiSS 80 kHz ... 10 MHz RS-485 2,5 / 5 / 10 Mb/s SPI 10 MHz max SSI 100 kHz ... 1 MHz
<b>Counting direction</b>	selectable through sw
<b>Start-up time</b>	500 ms
<b>Accuracy</b>	± 0,1° after assembly to motor and auto gain calibration completed
<b>Connector</b>	JST® 8 pin SM08B-SRSS-TB mating connector JST® SHR-08V-S or SHR-08V-S-B contacts JST® SSH-003T-P0.2-H (AWG 32-38)
<b>Electromagnetic compatibility</b>	according to 2014/30/EU directive
<b>RoHS</b>	according to 2011/65/EU directive

MECHANICAL SPECIFICATIONS	
<b>Bore diameter</b>	ø 4 mm
<b>Enclosure rating</b>	IP 10 (IEC 60529)
<b>Rotation speed</b>	12,000 rpm max
<b>Shock</b>	200 G, 6 ms (IEC 60068-2-27)
<b>Vibration</b>	30 G, 10 ... 2000 Hz (IEC 60068-2-6)
<b>Sensor support material</b>	plastic
<b>Hub material</b>	aluminum
<b>Housing material</b>	chrome plated steel
<b>Operating temperature<sup>2,3</sup></b>	-40° ... +115°C (-40° ... +239°F)
<b>Storage temperature<sup>3</sup></b>	-40° ... +115°C (-40° ... +239°F)
<b>Weight</b>	< 100 g (3,53 oz)


<sup>1</sup> as measured at the transducer without cable influences

<sup>2</sup> measured on the transducer flange

<sup>3</sup> condensation not allowed

CONNECTIONS				
Pin	BiSS-C	RS-485	SPI	SSI
1	+ V DC	+ V DC	+ V DC	+ V DC
2	0 V	0 V	0 V	0 V
3	MA+	DATA+	CLOCK	CLOCK +
4	MA-	DATA-	MOSI	CLOCK -
5	SLO+	NC	MISO	DATA +
6	SLO-	NC	NCS	DATA -
7	NC	NC	NC	SEL 1*
8	NC	NC	NC	SEL 2*

\* SEL1 and SEL2 pins are required during calibration by switching to SPI communication mode  
SSI option is configured via the shared SPI pins



**ENCODER KIT**

**BOTTOM SHIELD**   **BOTTOM HOUSING**   **MAGNET HUB**   **PCB MODULE**   **SHIELD COVER**

PRELIMINARY